



PLAN

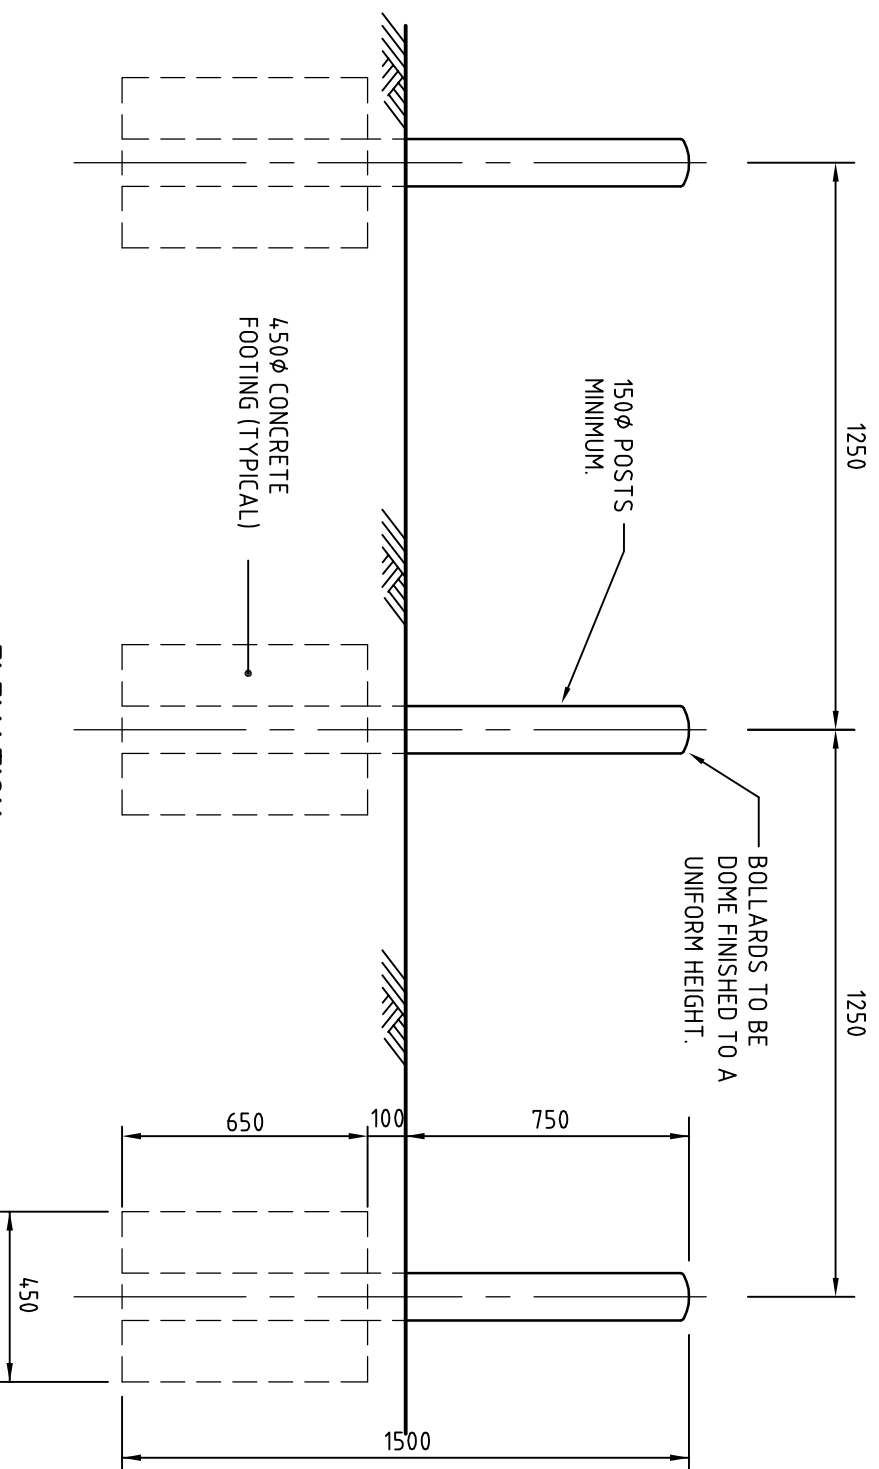

ELEVATION

NOTES:

1. ALL BOLLARDS SHALL BE TANOLITH TREATED PINE OR SIMILAR COUNCIL APPROVED.
2. CONCRETE TO HAVE A MINIMUM COMPRESSIVE STRENGTH OF 20MPa AT 28 DAYS.
3. ALL MEASUREMENTS IN MILLIMETERS UNLESS NOTED OTHERWISE.

 <p>shire of Kalamunda</p> <p>DEPARTMENT OF ENGINEERING SERVICES</p>		<p>TITLE: TIMBER BOLLARDS ADJACENT PUBLIC OPEN SPACE</p>	
<p>DRN: G. LAWRENCE</p> <p>APPROVED:</p>	<p>DATE: 31/07/2006</p>	<p>SCALE: SCALE 1:20</p> <p>DWG NO:</p>	<p>DATE:</p> <p style="text-align: center; font-size: 1.2em;">SHEET 1/30</p>