


SLOTS ARE EQUISPACED AROUND THE CIRCUMFERENCE.



NOTES:

1. TYPE 2 PIPE CONFORMING TO AS 2439 PART 1 1981.
2. PIPE CLASSIFICATION SN8.
3. SLOTS CONFIGURATION AS PER AUSTRALIAN STANDARDS.
4. MINIMUM 1500mm² SLOT/METRE OF PIPE.
5. THIS LAYOUT GIVES 1920mm²/M.
6. THE MARKINGS ON THE PIPE SHALL BE AS PER AUSTRALIAN STANDARDS.
7. ALL MEASUREMENTS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.

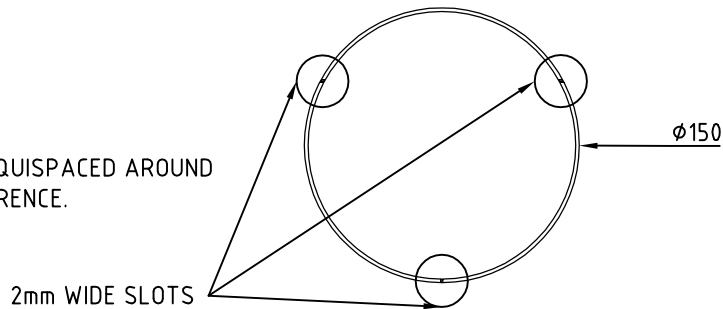

**shire of
kalamunda**

DEPARTMENT
OF
ENGINEERING SERVICES

TITLE:

**TYPICAL SLOT LAYOUT
SUB-SOIL DRAINAGE**

DRN: **G. LAWRENCE**

DATE: **21/05/2007**

AUTHORISED:

SCALE: **1:400**

DWG NO:

15/30

INIT:

DATE: